

Objectives: The objective of this exercise is to study the stability of different systems whose transfer functions are given.


List of Equipment/Software

MATLAB, Simulink

TASKS:

1) Determining the Stability

The following feedback loop is given

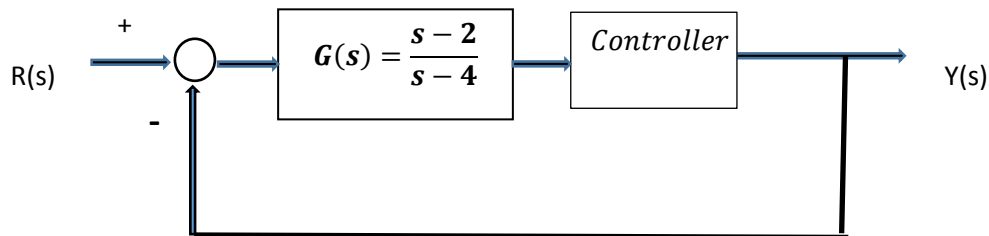

- a) Determine (without computation) which of the following controller transfer functions lead to an instable feedback loop

$$C_1(s) = \frac{s-4}{s+2} \quad C_2(s) = \frac{s+5}{s-2} \quad C_3(s) = -1.5$$

- b) Verify that the remaining controller transfer function leads to an internally stable feedback loop.
- c) Simulate the feedback loop with the plant $G(s)$ and C_1 . Give a reference step $r(t) = u(t)$ and measure the output $y(t)$.
- d) Simulate the feedback loop with the plant $G(s)$ and C_2 . Give a reference step $r(t) = u(t)$ and measure the output $y(t)$.
- e) Simulate the feedback loop with the plant $G(s)$ and C_3 . Give a reference step $r(t) = u(t)$ and measure the output $y(t)$.
- f) Compare your results.

2) Determining the steady state error

Consider the plant given by :

$$G(s) = \frac{s + 4}{(s + 7)(s^2 + 3s + 3)}$$

Assume that somebody designed a controller $C(s)$ with the transfer function

$$C(s) = K \frac{s + 7}{(s + 1)s}$$

- Assume that $K=1$. Show that the basic feedback loop with is stable.
- Which steady state error do you expect for the feedback loop?
- Simulate the feedback loop, check the steady state error. (use step input)
- Now simulate the feedback loop for $K=10$ and $K=0.1$. Compare your results.